



一 華 半 導 體 有 限 公 司
MOSDESIGN SEMICONDUCTOR CORP.

TAIPEI : TEL : 886-2- 22783733

FAX : 886-2- 22783633

H.K. : TEL : 852- 27569109

FAX : 852- 27566961

DOOR BELL
DUAL TONE

双音门铃 1/2 声 IC

SOUND EFFECT

M60/M602



FEATURES 功能叙述

- TG : OSH.
- DING : 780 Hz $\pm$ 30%.
- DONG : 625 Hz $\pm$ 30%.

P/N	OPT	TIME
M60	VSS	1 声
M602	X	2 声

APPLICATION 产品应用



- Doorbell, Musical instrument, Toys.

ELECTRICAL CHARACTERISTICS 电气规格

(@V_{DD}=3V unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作电压 Operating Voltage	V _{DD}	—	3	4.5	V	
工作电流 Operating Current	I _{OP}	—	0.1	0.5	mA	No load
静态电流 Quiescent Current	I _{SB}	—	1	5	μ A	
推动电流 OUT Driving Current	I _O	1	—	—	mA	@ V _{DS} =1V
振荡频率 Oscillator Frequency	F _{OSC}	—	50	—	KHz	External $\pm$ 30% R _{osc} =680K Ω
工作温度 Operating Temperature	Temp.	0	25	60	$^{\circ}$ C	

APPLICATION DIAGRAM 参考电路图

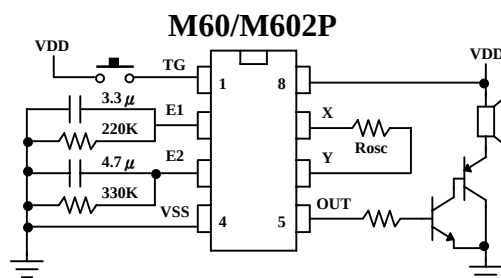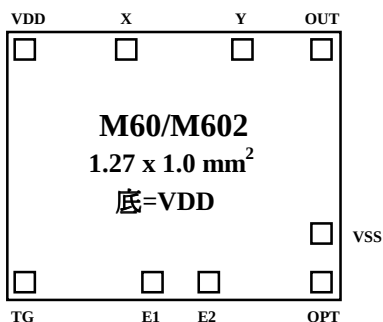

*All specs and applications shown above subject to change without prior notice.

(以上电路及规格仅供参考,本公司得径行修正)