
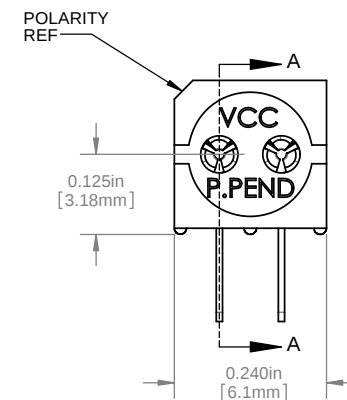
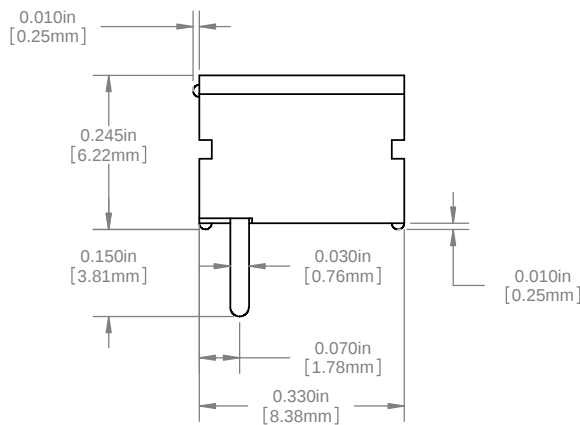
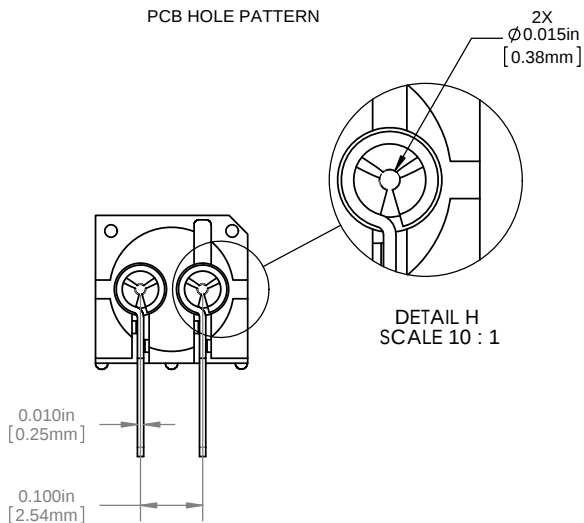





NOTES:

1. ROHS COMPLIANT
2. MATERIAL: HOUSING - NYLON 6/6, U.L. 94-V0 RATING, BLACK (UNLESS OTHERWISE SPECIFIED)
CONTACTS - PHOSPHOR BRONZE, TIN PLATED
3. MOUNTING: SPACING ON .250 [6.35mm] CENTERS
4. OPTO: STANDARD VISIBLE, IR LED, OR PHOTO DETECTOR WITH LEADS ON .100" [.25mm] CENTERS
5. LED LEAD DIMENSIONS: MINIMUM .017" [.43mm] ROUND OR SQUARE SHAPE. MAXIMUM .030" [.76mm]
THICKNESS - .040" [1.02mm] WIDTH
6. U.S. & FOREIGN PATENTS ISSUED

REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
-	001	REVISED PER ECR 111009AZ01	6/20/10	SMU	DZ
410	002	REVISED PER ECR 030712ED01	3/8/12	KH	AZ



ORDERING CODE : **PCH 330**

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE													
<table><tr><td></td><td>INCHES</td><td>MM</td></tr><tr><td>X</td><td>± .020</td><td>± .508</td></tr><tr><td>XX</td><td>± .010</td><td>± .254</td></tr><tr><td>XXX</td><td>± .005</td><td>± .127</td></tr></table>			INCHES	MM	X	± .020	± .508	XX	± .010	± .254	XXX	± .005	± .127	DRAWN		SMU	6/20/10
	INCHES	MM															
X	± .020	± .508															
XX	± .010	± .254															
XXX	± .005	± .127															
		CHECKED		DZ	6/20/10												
BREAK ALL CORNERS AND SHARP EDGES 90° MAX		MATERIAL		TITLE:													
		SEE NOTES		P-C-LITE® VERTICAL MOUNT													
THIRD ANGLE PROJECTION		FINISH		SIZE													
PROPRIETARY AND CONFIDENTIAL		SEE NOTES		DWG. NO.													
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.				PCH 330													
		DO NOT SCALE DRAWING		SCALE: 5:1													
				SHEET 1 OF 1													
				REV 002													