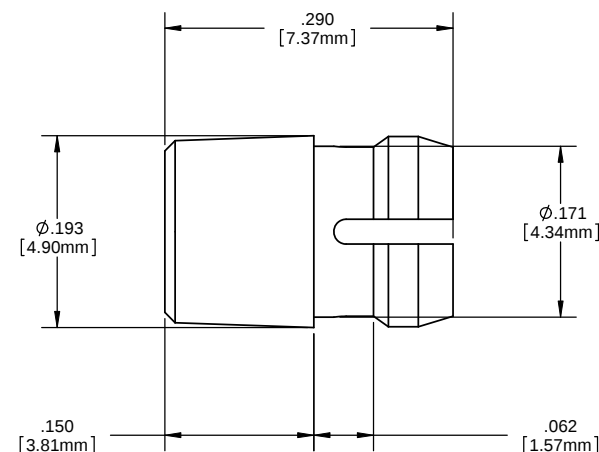





1. MOUNTING: Mounts in a $\varnothing .171 \pm .002$ [$\varnothing 4.34\text{mm} \pm .05$] panel hole on .250 [6.35mm] centers. Panel thickness .031 [.8mm] to .062 [1.59mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
GLO Series- Polycarbonate & Acrylic blend
4. U.S. & Foreign Pat. Issued & Pend.

REV. #		DESCRIPTION	DATE	INITIALS
1		ADD GLO SERIES	1-6-10	JG
	001	REVISED PER ECRI111009AZ01	4-23-10	SMU

ORDERING CODE : **SML 190 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT
GLO	WHITE TRANSLUCENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES:		MATERIAL		VISUAL COMMUNICATIONS COMPANY, INC.			
ANGLES	DECIMALS	POLYCARBONATE, UL 94-V2		190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccditc.com			
#1°	±.005						
FINISH	.XXX ±.005						
BREAK ALL CORNERS AND SHARP EDGES .005 MAX		FINISH		TITLE: 3MM ROUND STANDARD HEIGHT FRESNEL LENS			
		SEE NOTES					
THIRD ANGLE PROJECTION		APPROVAL		DATE		SIZE	
PROPRIETARY AND CONFIDENTIAL INFORMATION. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC.		DRAWN: SMU		4-23-10		DWG. NO. B SML 190 XXX	
		CHECKED: DZ				REV 001	
		DO NOT SCALE DRAWING		SCALE: 12:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[SML190RTP](#) [SML190BTP](#) [SML190CTP](#) [SML190GTP](#) [SML190ATP](#) [SML190YTP](#) [SML190GLO](#)